

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
12 August 2004 (12.08.2004)

PCT

(10) International Publication Number  
**WO 2004/067902 A1**

(51) International Patent Classification<sup>7</sup>: **E21B 17/043**

(21) International Application Number:

PCT/SE2004/000085

(22) International Filing Date: 26 January 2004 (26.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0300211-0

30 January 2003 (30.01.2003) SE

(71) Applicant (for all designated States except US): **ATLAS COPCO ROCK DRILLS AB** [SE/SE]; S-701 91 Örebro (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KANFLOD, Morgan** [SE/SE]; Runabyvägen 32, S-705 92 Örebro (SE). **ÖBERG, Fredrik** [SE/SE]; Restalundsvägen 75, S-702 16 Örebro (SE). **STENBERG, Bertil** [SE/SE]; Råntmätargatan 71, S-702 25 Örebro (SE).


(74) Agent: **GRUNDFELT, Gunnar**; Atlas Copco Rock Drills AB, Patents, S-701 91 Örebro (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **COUPLING SLEEVE FOR CONNECTION OF A THREADED ROCK BOLT TO AN IMPACT ROCK DRILLING MACHINE**

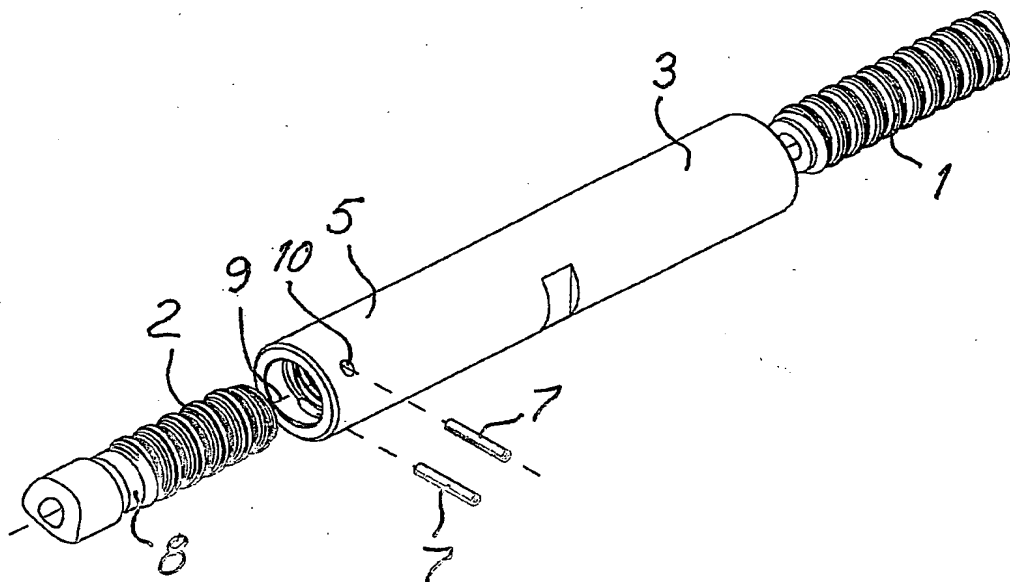

(57) Abstract: Coupling sleeve for connecting a threaded rock bolt (1) to an impact rock drilling machine (2) comprising a first part (3) provided with an internal thread (4) for connection of the rock bolt (1) and a second part (5) provided with an internal thread (6) for connection of the rock drilling machine (2), whereby the second part (5) comprises a transversely to a longitudinal axis (9) on the coupling sleeve arranged locking device (7) which cooperates with a region (8) on the rock drilling machine (2) for preventing that the coupling sleeve and the rock drilling machine (2) are separated.

WO 2004/067902 A1

WO 2004/067902 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

11/pt

Coupling sleeve for connection of a threaded rock bolt to an impact rock drilling machine

The present invention relates to a coupling sleeve for connection of a threaded rock bolt to an impact rock drilling machine. more specifically the invention is about a specific design of the coupling sleeve which secures that a certain of the two threaded connections of the coupling sleeve is loosened first when the rock drilling machine is disconnected from the rock bolt.

In a previously known solution for securing that a certain thread connection is loosened first, see SE 433 097, one uses threads with different pitches, different threads or cones in order to achieve a thread connection which is substantially more difficult to loosen than the other. These solutions have the drawback that one must use nonstandard parts. All the time one also must check which end is which in order to achieve correct connection.

In an attempt to solve the above mentioned problem, see WO 02/057591, a sleeve is clamped on the thread which is to be difficult to loosen. It has turned out that this solution has the drawback that it cannot take the shock wave loads to which the thread connection is exerted during drilling.

The present invention, which is defined in the subsequent claim, aims at doing away with the above mentioned drawbacks by providing the coupling sleeve with a locking device which cooperates with a region in the shank adapter of the rock drilling machine in order to prevent that the coupling sleeve and the rock drilling machine are separated when the rock drilling machine and the rock bolt are separated.

An embodiment of the invention is described below with reference to the accompanying drawing in which fig.1 shows a perspective view of a coupling sleeve according to the invention and a shank adapter and a rock bolt for cooperation with the coupling sleeve. Fig 2 shows a section through the device according to fig 1 with rock bolt and rock drilling machine connected to the coupling sleeve.

The coupling sleeve shown in the drawing comprises a first part 3 provided with an internal thread 4 to which a threaded rock bolt 1 is connectable. The threaded rock bolt is provided with a not shown drill bit for drilling of the hole in which the rock bolt is to be anchored. The coupling sleeve comprises also a second part 5 provided with an internal thread 6 to which a rock drilling machine 2 is connectable. In the drawing the shank adapter belonging to the rock drilling machine is shown. The coupling sleeve has a longitudinal axis 9. The coupling sleeve is in its second part 5 provided with two transversely to axis 9 arranged borings 10 in which a locking device 7 in form of two spring pins is arranged. The locking device 7 cooperates with a region 8 in order to prevent that the coupling sleeve and the rock drilling machine 2 are separated.

When setting a rock bolt 1 the shank adapter belonging to the rock drilling machine 2 is rotated at the same time as it is exerted to impacts. Through this a hole is drilled with rock bolt 1 in which hole the rock bolt is to be anchored. During drilling the locking device 7 is unloaded. After drilling the rock bolt 1 is to be separated from the coupling sleeve and left in the rock. Hereby the rock drilling machine is rotated for loosening of the thread connection. Through cooperation between the locking device 7 and region 8 which has a smaller diameter than the thread of the shank adapter it is prevented that the rock drilling machine 2 and the coupling sleeve are separated. After that the drillhole is filled around the rock bolt with cement or resin for anchoring of the rock bolt in the borehole.

## Claim:

1. Coupling sleeve for connecting a threaded rock bolt (1) to an impact rock drilling machine (2) comprising a first part (3) provided with an internal thread (4) for connection of the rock bolt (1) and a second part (5) provided with an internal thread (6) for connection of the rock drilling machine (2), characterized in that the second part (5) comprises a transversely to a longitudinal axis (9) on the coupling sleeve arranged locking device (7) which cooperates with a region (8) on the rock drilling machine (2) for preventing that the coupling sleeve and the rock drilling machine (2) are separated.

**THIS PAGE BLANK (u/rto)**

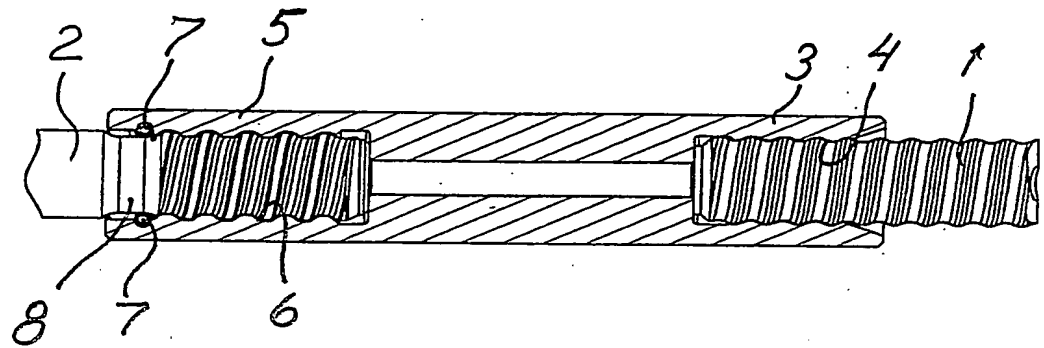


Fig. 2

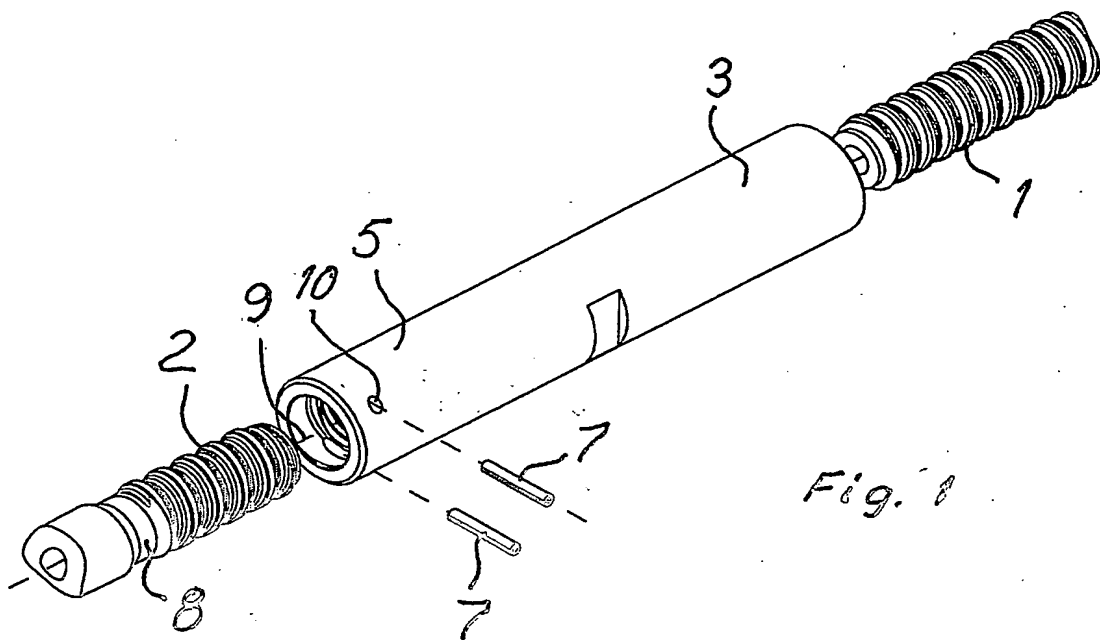


Fig. 1

JC20 Rec'd PCT/PTO 1 6 JUN 2005

THIS PAGE BLANK (USPTO)